





TABLE OF CONTENTS SERIES-5000 SMALL-BONE SYSTEM 3 **SERIES-6000 TRAUMA SYSTEM SERIES-7000 LARGE-BONE SYSTEM PULSE LAVAGE** Single-Use pg. 19 Semi-Disposable pg. 21 **ENERGY SUPPLIES Battery** pg. 23 23 Electric pg. 25 Pneumatic pg. 26

HARDWORKING

MicroAire® is a leading global brand of powered surgical instruments with a reputation for doing things right. That means quality craftsmanship, a caring customer service team, and a nationwide network of experienced and knowledgeable sales agents.

MicroAire® instruments are engineered and built in America, under rigorous quality standards, by skilled technicians who focus on the details of each individual instrument they make. This continues our 40-year tradition and commitment to produce the best powered instruments – not the most – and to view each customer as a partner.

The MicroAire® experience is better, and you'll feel that from your first encounter. We're in it for the long haul, with trusted hardworking products and dependable hardworking people.

SERIES-5000 Small-Bone System



- For extremities, hand & wrist, foot & ankle, oral-max
- Wide selection of quick-connect couplers for drilling, burring, rasping, reaming, and sawing
- Powered by the 5025 Electric Instrument Console
- Optional 5401 Foot Pedal

5000ET Variable-Speed Throttle Lever



5000E Without Finger Throttle



5000SC INSTRUMENT CASE WITH TRAY

- · High-quality, medical-grade polymer
- Withstands sterilization methods up to 193°C / 380°F
- 25cm x 52cm x 10cm



ACCESSORIES

5025	Electric Instrument Control Console	pg. 25
5006-5000	Electric Instrument Cable for 5025 Console	pg. 25
5401	Foot Pedal for 5025 Console	pg. 25
5025-5401	Foot Pedal Cable	pg. 25




5000-100 / 5000-200

Pneumatic Motor Handpiece

WITH THROTTLE

- For extremities, hand & wrist, foot & ankle, oral-max
- Wide selection of quick-connect couplers for drilling, burring, rasping, reaming, and sawing
- Variable-speed throttle
- Powered by compressed air or nitrogen
- Various air-hose connectors available to match your existing air-power source





-200 with Hall®-style air-hose connector



ACCESSORIES

Various air hoses and pneumatic accessories pg. 26

Drill and Bur Couplers

5130 HIGH-SPEED DRILL



Operating Speed: 83,000 RPM

- Maintains consistent high speed without bogging down under load
- · For drilling teeth
- Comes with an extra medium bur guard, cleaning brush, and replacement O-rings
- Long bur guard also available
- Use with MicroAire® ZB-series burs (excluding extra-long burs)

ACCESSORIES

5130-BG-M	Bur Guard, Medium
5130-BG-L	Bur Guard, Long
5130-BR	Cleaning Brush
5130-SP	Spare Parts Kit (O-rings)

5930 30K MICRO-DRILL



Operating Speed: 30,000 RPM

- The workhorse of small-bone surgery
- For drilling and sculpting of small bones
- · Built-in medium-length bur guard
- · Long and extra-long bur guards available
- Use with any of MicroAire's $^{\circ}$ extensive selection of ZB-series burs

ACCESSORIES

1100-005	Bur Guard, Long
1100-006	Bur Guard, Extra-Long

5980 JACOBS® STYLE DRILL



- · For bone drilling and plating
- Use with MicroAire® 8051 and 8054-series twist drills
- Use with twist drills of diameter between 1.0mm and 4.0mm, up to 127mm in length

MCCOAIRE BECOS DELL RET 500 ST 1004

ACCESSORIES

1645-004 Jacobs Key (included)

5990 SYNTHES® STYLE DRILL



Operating Speed: 1,670 RPM

- For bone drilling and plating
- Use with MicroAire® 8053-series quick-connect twist drills
- Use twist drills of diameter between 1.0mm and 3.5mm, up to 127mm in length

Saw Modules

5922 MICRO SAGITTAL SAW



Operating Speed: 30,000 CPM

- · For cutting transverse or wedge osteotomies
- Slender coupler and small blades provide excellent control, power, and maneuverability
- Accepts a variety of ultra-thin (.3mm) straight, angled, bent, or offset blades

5945 MICRO RECIPROCATING SAW



Operating Speed: 16,000 CPM

- · Accepts reciprocating blades for small-bone osteotomies and oral-max
- Also accepts rasps to file, shape, and smooth bones
- Shaping and contouring of small bones

5950 KEYLESS HALL® STYLE SAGITTAL SAW



Operating Speed: 18,000 CPM

- For transverse or wedge osteotomies
- Powerful saw designed to operate longer and larger sagittal blades
- Simple push-button release eliminates a hex wrench to lock blades
- Blades positioned at any location along a 160° arc
- · Good visibility and optimal approach

5955 HALL® STYLE SAGITTAL SAW MODULE



Operating Speed: 18,000 CPM

- For transverse or wedge osteotomies
- Powerful saw designed to operate longer and larger sagittal blades
- · Use a Hex Wrench to lock the blade
- Blades positioned at any location along a 160° arc
- · Good visibility and optimal approach

ACCESSORIES

2250-001 Hex Wrench (included)

5972 OSCILLATING SAW MODULE



Operating Speed: 30,000 CPM

- For small-bone osteotomies, bunionectomies, wedge osteotomies
- Accepts MicroAire® ZO-series small oscillating blades

ACCESSORIES

1745-001 Locking Tool



- Save 15 to 20 minutes per case, compared to using a mallet
- For hand & wrist, foot & ankle, shave precise layers, dorsal hump reductions, fusions, decortication
- Bone-graft harvesting
- Remove bone cement for revisions
- Linear impulse motor, essentially stationary blade, preventing jumping and heating at the tip

-100 with MicroAire®-style air-hose connector



-200 with Hall®-style air-hose connector



OSTEOTOMES AND GOUGES

2500-203	Osteotome 10mm x 50mm	MicroAire 92500-203
2500-205	Osteotome 06mm x 80mm	MicroAire*2500-205
2500-206	Osteotome 10mm x 80mm	MicroAire * 2500-206
2500-209	Osteotome 15mm x 70mm	MicroAire * 2500-209
2500-216	Osteotome 10mm x 80mm	MicroArm 2600-218
2500-316	Osteotome 06mm x 80mm	MicroAire*2500-316
2500-230	Gouge, Curved 10mm x 80mm	MicroAire* 2500-250

ACCESSORIES

Various air hoses and pneumatic accessories pg. 26



1625-100 / 1625-200

Pencil-Grip Wire Driver

UNITIZED

PNEUMATIC 🗯

- Cannulated to 1.6mm
- Accepts K-wires with 1600-series wire guides
- Also accepts special Twist Drills (wire guide 1600-012NS required, not included)
- · Various air-hose connectors available to match your existing air-power source
- -100 with MicroAire®-style air-hose connector



-200 with Hall®-style air-hose connector



ACCESSORIES

6640-002 Wire Guard

Various air hoses and pneumatic accessories pg. 26

SERIES-6000

Trauma System



6643

Battery SmartDriver™

CORDLESS/BATTERY (4)

- Up to 0.98 N-m (140 oz-in) torque at 1,600 RPM
- Up to 3.5 N-m (496 oz-in) torque at 500 RPM
- For ACL, drilling, fixation, Ilizarov, I.M. nailing, trauma
- Wide selection of quick-connect couplers for drilling, burring, rasping, reaming, and sawing
- Powered by money-saving, strong, and long-lasting NiMH battery
- · Variable-speed, dual trigger
- Forward, reverse
- Double-trigger oscillate feature prevents spooling of soft tissue
- Autoclavable or aseptic transfer batteries available
- Validated for automated washer/disinfectors
- · Not for total knee or hip replacement

6643-045 WIRE-DRIVER COLLET

Fits only 6643 Battery SmartDriver™

Operating Speed: 1,600 RPM

Wires 0.7mm - 1.6mm



Operating Speed: 1,600 RPM

Pins 1.7mm – 3.2mm



ACCESSORIES

6640-002 Wire Guard

Various batteries and charging accessories pg. 23



5641

Electric SmartDriver™

ELECTRIC 4

- Up to 0.98 N-m (140 oz-in) torque at 1,600 RPM
- Up to 3.5 N-m (496 oz-in) torque at 500 RPM
- For ACL, drilling, fixation, Ilizarov, I.M. nailing, trauma
- Wide selection of quick-connect couplers for drilling, burring, rasping, reaming, and sawing
- Powered by the 5025 Console with onboard max speed setting
- Variable speed forward and reverse triggers
- Double-trigger oscillate feature prevents spooling of soft tissue

5641-045 WIRE-DRIVER COLLET

Fits only 5641 Electric SmartDriver™

Operating Speed: 1,600 RPM

Wires 0.7mm - 1.6mm



5641-050 PIN-DRIVER COLLET

Fits only 5641 Electric SmartDriver™

Operating Speed: 1,600 RPM

Pins 1.7mm – 3.2mm



5641SC INSTRUMENT CASE WITH TRAY

- High-quality, medical-grade polymer
- Base holds the SmartDriver[™] handpiece and air hose or electric cable
- Insert tray holds couplers and wire/pin couplers
- Slots for measuring the diameter of K-wires and Steinmann Pins
- Withstands sterilization methods up to 193°C / 380°F
- 25cm x 37.5cm x 10cm



ACCESSORIES

6640-002	Wire Guard	
5025	Electric Instrument Control Console	pg. 25
5006-5000	Electric Instrument Cable for 5025 Console	pg. 25



6640-100 / 6640-200

Pneumatic SmartDriver™

PNEUMATIC 🗯

- Up to 0.98 N-m (140 oz-in) torque at 1,600 RPM
- Up to 3.5 N-m (496 oz-in) torque at 500 RPM
- For ACL, drilling, fixation, Ilizarov, I.M. nailing, trauma
- Wide selection of quick-connect couplers for drilling, burring, rasping, reaming, and sawing
- Powered by compressed air or nitrogen
- Variable-speed trigger
- Forward/reverse selector

-100 with MicroAire®-style air-hose connector



-200 with Hall®-style air-hose connector



6645 WIRE-DRIVER COLLET

Fits only 6640 Pneumatic SmartDriver™

Operating Speed: 1,600 RPM

Wires 0.7mm - 1.6mm

6650 PIN-DRIVER COLLET

Fits only 6640 Pneumatic SmartDriver™

Operating Speed: 1,600 RPM

Pins 1.7mm – 3.2mm

ACCESSORIES

5641SC SmartDriver[™] Instrument Case pg. 10

Various air hoses and pneumatic accessories pg. 26

Drilling Couplers

The SmartDriver™ system offers exceptional speed and torque for drilling, screwing, and plating.

6660 TRINKLE COUPLER

Operating Speed: 1,600 RPM

Torque: 0.98 N-m (140 oz-in)



6688 KEYLESS JACOBS® COUPLER 1/4"

Operating Speed: 1,600 RPM

Torque: 0.98 N-m (140 oz-in)



6680 JACOBS® COUPLER 5/32"

Operating Speed: 1,600 RPM

Torque: 0.98 N-m (140 oz-in)



6690 SYNTHES® QUICK CONNECT COUPLER

Operating Speed: 1,600 RPM

Torque: 0.98 N-m (140 oz-in)



6686 JACOBS® COUPLER 1/4"

Operating Speed: 1,600 RPM

Torque: 0.98 N-m (140 oz-in)



Reaming Couplers

A powerful choice for tunneling during ACL surgery, plating, and intermedullary reaming for humeral and femoral nails.

6665 HUDSON® HIGH-TORQUE REAMER COUPLER

Operating Speed: 500 RPM

Torque: 3.5 N-m (496 oz-in)



6685 JACOBS® HIGH-TORQUE REAMER COUPLER 1/4"

Operating Speed: 500 RPM

Torque: 3.5 N-m (496 oz-in)



6687 ZIMMER® (HUDSON® MODIFIED TRINKLE) REAMER

Operating Speed: 500 RPM

Torque: 3.5 N-m (496 oz-in)



6689 SYNTHES® REAMER COUPLER

Operating Speed: 500 RPM

Torque: 3.5 N-m (496 oz-in)



Sawing Couplers

Heavy-duty sagittal saw couplers in a variety of styles (quick-connect keyless connections or with hex wrench) for precise osteotomy, arthrotomy, and ACL. Reciprocating saw coupler accepts blades or rasps, for amputation, ENT, and oral-max.

6670 SAGITTAL SAW COUPLER WITH HEX WRENCH

Operating Speed: 18,000 CPM





- Accepts MicroAire® ZS-0XX and ZS-3XX Sagittal Blades
- 2250-001 Hex Wrench (included)

6672 KEYLESS SAGITTAL SAW COUPLER

Operating Speed: 18,000 CPM







6673 HEAVY-DUTY SAGITTAL SAW COUPLER

Operating Speed: 18,000 CPM





- Accepts MicroAire® ZO-7XXX (not longer than 71mm), ZS-0XX and ZS-3XX Sagittal Blades
- 2250-001 Hex Wrench (included)

6400 RECIPROCATING SAW COUPLER

Operating speed 16,000 CPM

- Use blades or rasps
- For amputation
- Accepts MicroAire® 1400 Series and ZR Series Reciprocating Blades and Rasps

SERIES-7000

Large-Bone System

CORDLESS/BATTERY (4)

• Uses autoclavable or aseptic transfer NiMH Battery



7505 CORDLESS Drill/Poan

Drill/Reamer

- Operates at two speeds for multiple drilling and reaming applications
- · For drilling, reaming, and pinning

DRILL

Speed	750 RPM
Torque	5.6 N-m (800 oz-in)

REAMER

Speed	250 RPM
Torque	16.9 N-m (2,400 oz-in)

7506 CORDLESS

Sagittal Saw

- Dual-speed control
- Secure latch-style blade locking system
- Cutting head may be rotated into 8 positions for cutting in any plane
- Power and speed for complete osteotomies

High speed	15,000 CPM
Low speed	12,000 CPM
Arc	4°

7507 CORDLESS

Reciprocating Saw

- Simple twist-lock blade hub
- For large-bone osteotomy

Saw speed	15,000 CPM
Blade stroke	3.2mm
Blade rotation	360°

7505-045 WIRE/PIN DRIVER COUPLER

Fits 7505 Drill/Reamer

Operating Speed: 750 RPM

Accepts wires and pins from 1.6mm - 2.8mm



Fits 7505 Drill/Reamer

Operating Speed: 750 RPM

Accepts wires and pins from 3.2mm – 4.4mm



Various batteries and charging accessories pg. 23







- Designed for use in automated washer disinfector systems
- · Aluminum outer case and lid to minimize weight and maintain durability
- Nylon coated brackets protect the handpieces and couplers
- Inner tray is made from medical-grade stainless steel
- Inner tray is designed to hold three handpieces, fourteen drive couplers, and wire/pin couplers
- 24.28cm x 38.50cm x 19.86cm



PNEUMATIC 🗯



7105-200
PNEUMATIC
Drill/Reamer

DRILL

Speed 750 RPM

Torque 5.6 N-m (800 oz-in)

REAMER

Speed	250 RPM
Torque	16.9 N-m (2,400 oz-in)



locking system

Saw speed	13,000 CPM	
Arc	4.5°	
Secure latch-style blade		



MICROAIRI

Reciprocating Saw

Saw speed	14,000 CPM
Blade stroke	3.2mm
Blade rotation	360°

with Hall®-style
air-hose connector



7100-045 WIRE/PIN DRIVER COUPLER

Fits 7105-200

Operating Speed: 750 RPM

Accepts wires and pins from 1.6mm - 2.8mm

7100-050 PIN DRIVER COUPLER

Fits 7105-200

Operating Speed: 750 RPM

Accepts pins from 3.2mm – 4.4mm

ACCESSORIES

Various air hoses and pneumatic accessories pg. 26



9700-000 INSTRUMENT CASE PNEUMATIC LARGE-BONE SYSTEM

- Medical-grade polymer and aluminum construction provides durability
- Base holds 3 handpieces and hose
- Insert tray is molded with compartments for 11 couplers and pin driver
- Additional space for other accessories
- 25cm x 50cm x 10cm



Drilling Couplers

7100-003 JACOBS®-STYLE COUPLER 1/4"

(with key)

Operating Speed: 750 RPM

Torque: 5.6 N-m (800 oz-in)



4100-030 Key (included)

(Hudson® Modified Trinkle)

7100-001 ZIMMER® REAMER COUPLER

Operating Speed: 250 RPM

Torque: 16.9 N-m (2,400 oz-in)

Reaming Couplers



7100-004 KEYLESS COUPLER 1/4"

Operating Speed: 750 RPM

Torque: 5.6 N-m (800 oz-in)



7100-008 HUDSON® REAMER COUPLER

Operating Speed: 250 RPM

Torque: 16.9 N-m (2,400 oz-in)



7100-005 KEYLESS COUPLER 1/8"

Operating Speed: 750 RPM

Torque: 5.6 N-m (800 oz-in)



7100-010 JACOBS®- STYLE COUPLER ¼"

Operating Speed: 250 RPM

Torque: 16.9 N-m (2,400 oz-in)



7100-006 SYNTHES® QUICK-CONNECT COUPLER

Operating Speed: 750 RPM

Torque: 5.6 N-m (800 oz-in)



7100-111 SYNTHES® REAMER COUPLER

Operating Speed: 250 RPM

Torque: 16.9 N-m (2,400 oz-in)



7100-051 COUPLER 1/4" (Zimmer® Hudson® Modified Trinkle Coupler)

Operating Speed: 750 RPM

Torque: 5.6 N-m (800 oz-in)



7100-058 HUDSON® COUPLER

Operating Speed: 750 RPM

Torque: 5.6 N-m (800 oz-in)





ACCESSORIES


Various batteries and charging accessories

• Uses autoclavable or aseptic transfer NiMH Battery

• Handpiece and guard validated for use in automated washer/disinfector

pg. 23

Pulse Lavage

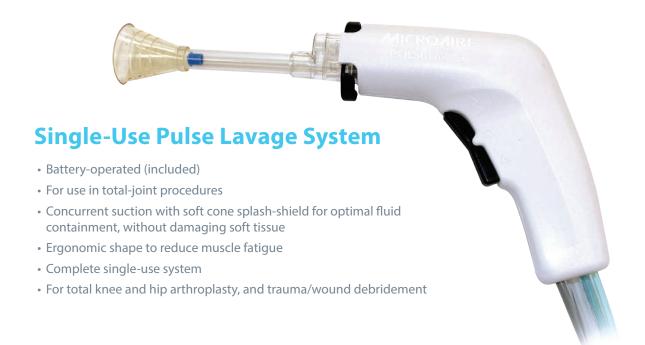

201-02-00 HANDPIECE KIT

- Handpiece and battery
- Tubing



201-03-00 KNEE KIT

- Handpiece and battery
- · Shower spray tip with splash shield



201-04-00 HIP KIT

- Handpiece and battery
- Shower spray tip with splash shield



201-05-00 FAN SPRAY KIT

- Handpiece and battery
- Fan spray tip with splash shield





SINGLE-USE PULSE LAVAGE COMPATIBLE TIPS





-100 with MicroAire®-style air-hose connector



-200 with Hall®-style air-hose connector



5740-060 GENERAL TUBING PACKAGE

- 5740-020 Standard Tubing
- 5740-005 Showerhead Nozzle





5740-061 HIP TUBING SET

- 5740-020 Standard Tubing
- 5740-005 Showerhead Nozzle
- 5740-006 Femoral Spray Nozzle





5740-061S HIP TUBING SET WITH SUCTION

- 5740-020S Standard Tubing with Suction
- 5740-005S Showerhead Nozzle with Suction
- 5740-006S Femoral Spray Nozzle with Suction



5740-062 KNEE TUBING SET

- 5740-020 Standard Tubing
- 5740-008 Angled Showerhead Nozzle



ACCESSORIES

4740-013 Small Splash Shield (4 cm)



4700-015 Large Splash Shield (15 cm)



4700-016 Medium Splash Shield (10 cm)



Various air hoses and pneumatic accessories

pg. 26

Energy Supplies

Battery Power CORDLESS/BATTERY (4)

MicroAire® NiMH batteries are the strongest and longest-lasting batteries in the industry. We'll keep you running through the toughest cases.

Compared to lithium-ion batteries, MicroAire® NiMH batteries might be slightly heavier, but they are the strongest and longest-lasting batteries in the industry — with cost savings from every procedure.

BENEFITS

- · Longer run time
- · Longer shelf life
- No limit on reuse (no counter inside)
- · No need to drain before charging
- No recharge-memory limits
- 30% more torque
- Full one-year warranty (compare to other brands with 90-day warranty)

ENVIRONMENTALLY FRIENDLY

- No special disposal requirements
- · No heavy metals
- Quick charging

STERILIZATION OPTIONS

- Autoclave
- Sterrad®
- Steris® VPro Max

7505-710 UNIVERSAL LARGE BATTERY

- Fits all MicroAire® powered orthopedic instruments
- 14.4 volts
- Full one-year warranty the best in the industry



6640-710 SMARTDRIVER™ BATTERY

- Fits SmartDriver[™] instruments and 7800 Sternum Saw
- Smaller and lighter than the 7505-710 Large NiMH Battery
- 14.4 volts provide unparalleled strength and run time
- Full one-year warranty the best in the industry





7500-700 BATTERY CHARGER

- Charges 14.4-volt Nickel Metal Hydride (NiMH) autoclavable or aseptic-transfer battery
- Charge up to four MicroAire® NiMH batteries at one time
- SmartDriver™ and Large-Bone batteries can be charged at the same time
- NiMH batteries have longer run times and do not require memory-based charging
- Batteries charged in 90 minutes or less



UNIVERSAL DROP-IN ASEPTIC BATTERY KIT

 $\bullet \ \ \text{Fits all MicroAire} \\ \bullet \ \ \text{battery-powered orthopedic instruments}$

 \bullet The battery itself is not autoclaved, only the 7500-615 housing

 \bullet Smaller and lighter than the 7505-710 Large Battery

• Full one-year warranty – the best in the industry

7500-620	Aseptic 14.4V NiMH Battery	
7500-625	Charging Adapter	
7500-630	Aseptic Transfer Shield	
7500-615	Battery Housing	



Electric Power ELECTRIC 4



5025

Electric Instrument Control Console

- Run two handpieces simultaneously
- Intuitive touchscreen interface
- SmartLoop technology pushes more power when you need it, to maintain consistent speed
- For use with Series-5000 small-bone instruments, and Series-6000 trauma instruments



5401 **ELECTRIC FOOT PEDAL**

- Compatible with 5025 console only
- Two pedals provide variable-speed control for forward or reverse rotation
- Irrigation control
- 5025-5401 connection cable sold separately

Foot Pedal Connection Cable



INSTRUMENT CABLES

5006-5000

Cable for Series-5000 and Connects 5000E, 5000ET, and 5641 SmartDriver™ to 5025 Power Console Series-6000 Instruments



5006-1000	Cable for Series-1000	Connects 1000E and 1000ET	
5000-1000	Electric Instruments	to 5025 Power Console	

Cable for Series-1000 Connects older-model 1000E and 1000ET 1006-1000 to older-model 1025 Power Console **Electric Instruments**



Electric cord to wall socket, with EU-style plug



MicroAire® pneumatic air hoses, regulators, and connection manifolds provide a reliable and time-proven source of power in the operating room. Smooth, consistent power, with a variety of adaptors for connections to most standard systems.

9000-Series **Air Hoses**


- Standard double-air hoses
- · Vent at the diffuser end
- Outer hose is black silicone



7000-Series "Whisper" Hoses

- Standard double-air hoses
- Vent at the diffuser end
- · Outer hose is gray, double-layer vulcanized rubber supported with nylon mesh
- Reduce instrument noise up to 40%

7013-020 "Whisper" Hose, 6m (20 ft)

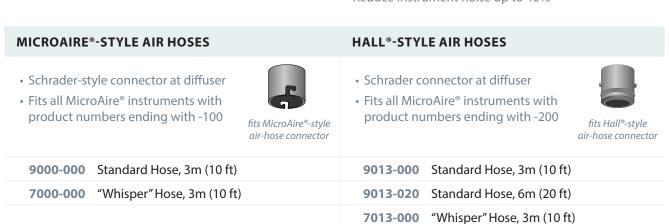

Air Hose Extensions

SCHRADER to SCHRADER			
9300-010	Extension hose, 3m (10 ft)	Replaces: Linvatec/Hall® 5052-18	
9300-020	Extension Hose, 6m (20 ft)	Replaces: Linvatec/Hall® 5052-31	



SCHRADER to DISS	(Ohio)
------------------	--------

Extension Hose, 3m (10ft) Replaces: Linvatec/Hall® 5052-29 9300-030



Multiple-Connection Manifolds

- Connect multiple air hoses to a single pressure regulator
- Includes 3m (10-ft) extension hose connecting to Schrader coupler

CONNECTOR OPTIONS

9500-004 Ohio / Schrader Adapter

9500-002 Schrader Input Connector

- Adapts Hall®, 3M®, and MicroAire® hoses to thread fitting, ¼" NPT
- 1000 PS
- Accepts Schrader connectors (Hall®, 3M®, and MicroAire® hose)
- Plugs into standard Hall® type regulator



Regulators

- Accepts MicroAire®, Hall®, and 3M® air hoses
- Main tank and pressure output gauges
- Accepts Schrader connectors (Hall®, 3M®, or MicroAire® standard hose)

9500-000	Single regulator	9502-000	Dual regulator
	AICHOOGIRE AT THE STATE OF THE		

All dimensions shown are nominal values subject to standard variances and tolerances.

 $\label{eq:microAire} \mbox{MicroAire Surgical Instruments LLC.}$

The following companies are not affiliated with MicroAire Surgical Instruments LLC:

Dyonics® is a trademark of Dyonics, Inc.

 $\label{prop:condition} \textit{Hudson} \, \text{$^{\circ}$ is a registered trademark of Hudson Respiratory Care Co.}$

 ${\sf Jacobs}^{\circledast} \ is \ a \ registered \ trademark \ of \ {\sf Jacobs}.$

 $Linvatec^{\circ}, Hall^{\circ}, Cebotome^{\text{$^{\top}$}}, Osteon^{\text{$^{\top}$}}, and \ Neurairtome^{\text{$^{\top}$}}\ Mini-Driver^{\circ}, Maxi-Driver^{\circ}\ and \ Maxion^{\text{$^{\top}$}}\ are\ trademarks\ of\ Linvatec^{\circ}\ Corporation,\ a\ subsidiary\ of\ ConMed\ Corporation.$

Stryker® is a registered trademark of Stryker Corporation.

Synthes® is a registered trademark of Depuy Synthes.



MicroAire Surgical Instruments

3590 Grand Forks Boulevard Charlottesville, VA 22911 USA 800 722 0822 or +434 975 8000 www.microaire.com

© 2022 MicroAire Surgical Instruments, LLC All rights reserved.

LIT-POWERCATALOG REV F